Wall Mount & Floor Stand 51.2V 100Ah LiFePO4 Battery






battery BMS supports simultaneous communication and docking with multiple inverter brands





Super Points: ONE Battery For Multiple Brand Inverters

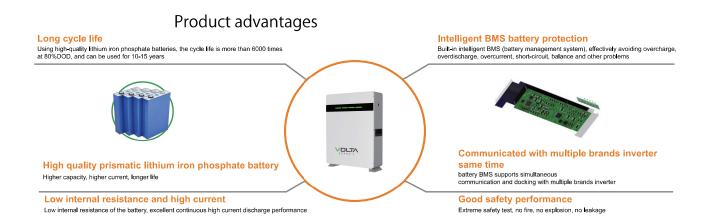




Parameters


Product model	VOLTA STAGE 1
Product specification	51.2V 100Ah
Nominal voltage	51.2V
Nominal capacity	100Ah
Cell type	(LFP)
Charge Voltage	55.2V-56VDC
Max charge current	100A
Discharge cut-off voltage	44.8V
Max discharge current	100A
Parallels Function	Support 8 units in parallels
Communication interface	RS485、RS232、CAN(Optional)
Cycle life	≥6000 Cycles (80%DOD)
Charge temperature range	0∼65°C
Discharge temperature range	-20~65°C
Colour	(Grey and white)
Dimensions	480*600*150MM
Weight	48Kg
Installation method	Wall mounted / Floor Stand
Warranty	10 Years For Cells,5 Years For BMS

Drawing

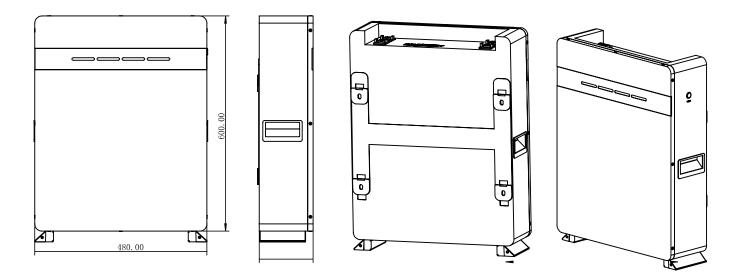


Parallel Connection Of Batteries

Connect the positive pole and positive pole in parallel, and the negative pole and negative pole in parallel, as shown in the figure below

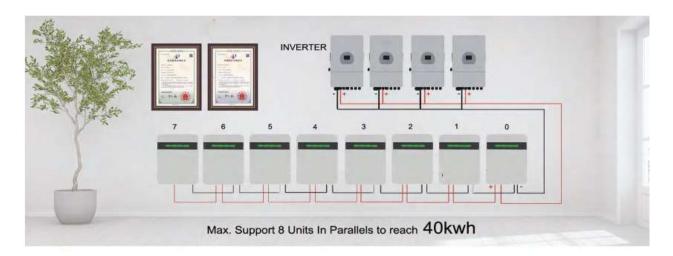



Cycle Life Curve

Different discharge depth life curves &25℃0.5C



Different discharge depth life curves &40℃0.5C



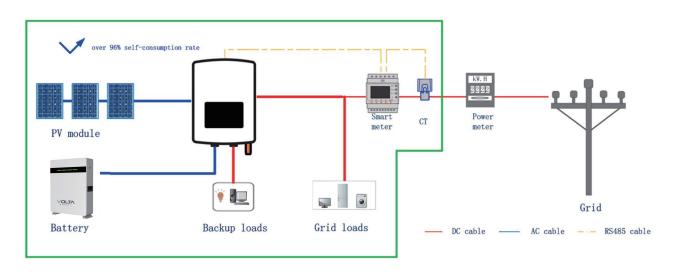

solar controller



